


# LED Precision Approach Path Indicator

## AH-HP-PAPI

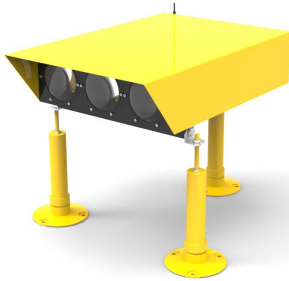


The LED Precision Approach Path Indicator (PAPI) is used to guide aircraft to approach the runway at an appropriate altitude. It is specially designed to accommodate the helicopter's steep angles of descent and deliberate speeds.

There are two Colors which to show two wide horizontal beams in different colored light. And it is projected in fan shaped array into the incoming flight pattern.

Solar power system is optional for PAPI.

PAPI Visual Indication:

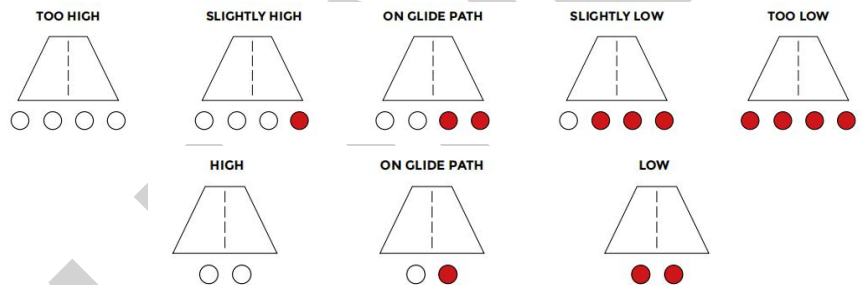

### APPLICATION



### Compliance

- ICAO Annex 14 Volume I 6th Edition dated 2013 clauses, 5.3.5.28 - 5.3.5.40, Figure A2-23 Appendix 1, 2.1.1
- FAA AC 150/5390-2B Heliport Design Guide

### Features

#### Electrical

- LED as light source saving power consumption and maintenance, 95% less power than equivalent incandescent light
- Power supply available in AC(110, 240VAC), DC48V or others

#### Physical

- Unique designed polycarbonate lens for converging light and also provides corrosion resistance and UV protection.
- UV protection Powder coated bright yellow color base make better visibility
- Housing material is stainless steel which has strong corrosion resistance, Shock and Vibrations protection
- Fragile coupling reduce the secondary damage to helicopters effectively

#### Optional

- Clinometer
- VHF pilot to ground remote control
- Solar power system


### Application

- Permanent, Temporary, Emergency Helipad/Airport/Helideck
- OFFSHORE/ ONSHORE USAGE

# LED Precision Approach Path Indicator

## AH-HP-PAPI

### Drawing(mm)

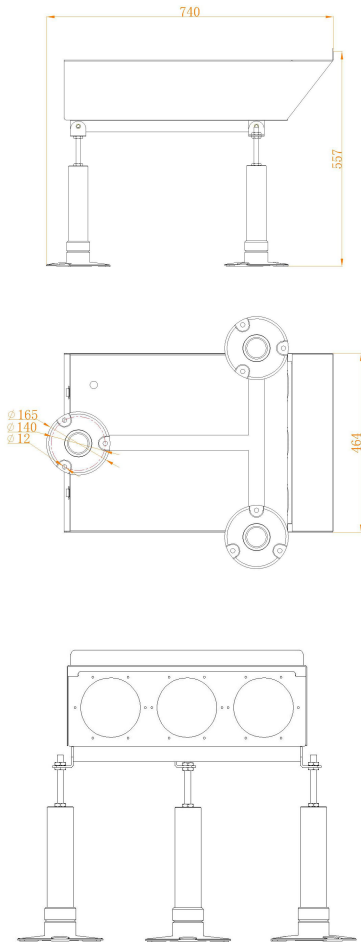

### SPECIFICATIONS

### AH-HP-PAPI LED Precision Approach Path Indicator

#### Light Characteristics

Light Source  
Available Colors  
Azimuth range(degree)  
Working mode  
Operation Mode  
LED Life Experience(hours)

LED  
Red/White  
8°  
Steady burning  
24hours operation  
>100,000

#### Electrical Characteristics

Operating Voltage  
Power(W)  
Circuit Protection

AC220V  
70W\*3  
Integrated

#### Physical Characteristics

Body Material  
Leg material  
Mounting  
Dimension(mm)  
Weight(kg)

Stainless steel  
Die casting aluminum  
140x M10  
557x740x464  
18

#### Environmental Factors

Ambient Temperature(°C)  
Humidity  
Wind Speed  
Waterproof

-35~80  
10~90%  
80m/s  
IP65

#### Compliance

ICAO

ICAO, Annex 14th, Volume I, 6th Edition dated 2013, clauses 5.3.5.28 – 5.3.5.40, Figure A2-23 Appendix 1, 2.1.1

#### Options Available

Solar Power system  
VHF Pilot to Ground Remote Control  
Wireless Remote Control

### Optional: Solar Panel



### Power Bank:

